



LatViz: A New Practical Tool for Performing Interactive Exploration over Concept Lattices

Mehwish Alam, Thi Nhu Nguyen Le, Amedeo Napoli

► To cite this version:

Mehwish Alam, Thi Nhu Nguyen Le, Amedeo Napoli. LatViz: A New Practical Tool for Performing Interactive Exploration over Concept Lattices. CLA 2016 - Thirteenth International Conference on Concept Lattices and Their Applications , Jul 2016, Moscow, Russia. hal-01420751

HAL Id: hal-01420751

<https://inria.hal.science/hal-01420751>

Submitted on 21 Dec 2016

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

LatViz: A New Practical Tool for Performing Interactive Exploration over Concept Lattices

Mehwish Alam¹, Thi Nhu Nguyen Le², and Amedeo Napoli²

1. Laboratoire d'Informatique de Paris-Nord, Université Paris 13, Paris, France

2. LORIA (CNRS – Inria Nancy Grand Est – Université de Lorraine)

BP 239, Vandoeuvre-lès-Nancy, F-54506, France

{alam@lipn.univ-paris13.fr}{[thi-nhu-nguyen.le](mailto:thi-nhu-nguyen.le@loria.fr), amedeo.napoli@loria.fr}

Abstract. With the increase in Web of Data (WOD) many new challenges regarding exploration, interaction, analysis and discovery have surfaced. One of the basic building blocks of data analysis is classification. Many studies have been conducted concerning Formal Concept Analysis (FCA) and its variants over WOD. But one fundamental question is, after these concept lattices are obtained on top of WOD, how the user can interactively explore and analyze this data through concept lattices. To achieve this goal, we introduce a new tool called as **LatViz**, which allows the construction of concept lattices and their navigation. **LatViz** proposes some remarkable improvements over existing tools and introduces various new functionalities such as interaction with expert, visualization of Pattern Structures, AOC posets, concept annotations, filtering concept lattice based on several criteria and finally, an intuitive visualization of implications. This way the user can effectively perform an interactive exploration over a concept lattice which is a basis for a strong user interaction with WOD for data analysis.

Keywords: Lattice Visualization, Interactive Exploration, Web of Data, Formal Concept Analysis.

1 Introduction

In the last decade, there has been a huge shift from the Web of Documents to the Web of Data (WOD). Web of Documents represents data in the form of HTML pages which linked with other HTML pages through hyperlinks. This web of documents has evolved into WOD where all the information contained is represented in the form of entity and relations allowing the semantics to be embedded in the representation of the this data. This data are in the form of a (node-arc) labeled graph belonging to several domains such as newspapers, publications, biomedical data etc. The growth in the publication of data sources in WOD has made it an important source of data, which has led towards many challenges pertaining to effective utilization of this data. WOD mainly represents data in the form of Resource Description Framework (RDF)¹. There are several ways such as data

¹ <http://www.w3.org/RDF/>

dumps and SPARQL queries to access this data, which can be utilized for many purposes, one of which is visualization and interactive exploration for data analysis purposes. Several visualization tools have been developed for this purpose, one of which is LODLive² [1], where user can choose data-sets such as DBpedia and Freebase and specify an entity as a starting point for browsing the node-arc labeled graph. Another tool based on graphical display is RelFinder [2], where given several entities the tool automatically finds the paths connecting these entities. The major drawback of LODLive is that after two hops the number of nodes increase and it is hard to visualize the data. Moreover, these tools are good for getting an insight into what RDF graph contains but they are not built for the purpose of knowledge discovery.

In order to provide the user with the ability to perform data analysis and knowledge discovery over such kind of data, there is a need to perform classification, where the obtained classes are further made available to the user for exploration and subjective interpretation. In the current study we use Formal Concept Analysis as the basis for classification. Several studies have already been conducted using FCA and its variants over RDF graphs or its generalization to knowledge graphs. Out of these studies so far RV-Xplorer [3] is the only tool that actually allows interactive exploration of clustered RDF data [4]. The purpose of this paper is to enhance the functionalities discussed in the previous two studies. In this study we introduce a new tool **LatViz** which increases the interpretability of a concept lattice by remarkably improving the user interaction with the concept lattice as compared to existing tools. Various new functionalities have been introduced such as the visualization of Pattern Structures and AOC-posets, concept annotation, filtering concept lattice and pattern concept lattice based on several criteria and finally, an intuitive visualization of implications. This way the user can effectively perform an interactive exploration over a concept lattice which in turn gives a basis for a strong user interaction with WOD for knowledge discovery purposes. In this paper, we detail the important interaction operations implemented in **LatViz**. In the rest of this paper we refer to “user” as an “expert” as (s)he needs to have some basic knowledge about the lattice structure.

The paper is structured as follows: Section 2 introduces a motivating example, Section 3 introduces the background required for understanding the rest of the paper while Section 4 introduces some of the important functionalities of **LatViz**. Then in Section 5, we discuss some of the related tools already developed and finally Section 6 details the future perspectives of the current work.

2 Motivating Example

Let us consider that an expert is searching for papers published by a particular team in conferences or journals related to his/her field of research. In order to locate the papers of his/her interest (s)he has to search for specific keywords

² <http://en.lodlive.it/>

or authors in the local portal. For getting the view of which kind of papers are contained (s)he has to run a broad query and then narrow down his/her query to obtain papers on specific keywords or authors or group of keywords or authors. The expert will end up running several queries to get what (s)he wants. Moreover, if the expert wants to know the collaborations of the team with other members of the research community outside the team, as well as the diversity and the specialization of the team members, this cannot be directly obtained by simple querying. To obtain such kind of knowledge there is a need to introduce a support for data analysis. Based on this scenario, we show how the expert can be guided thanks to an adapted visualization tool to obtain such information of interest with the help of concept lattices.

3 Preliminaries

3.1 Pattern Structures

In this section we provide a brief introduction to pattern structures [5]. A pattern structure is a triple $(G, (D, \sqcap), \delta)$, where G is the set of objects, (D, \sqcap) is a meet-semilattice of descriptions D equipped with a similarity measure \sqcap , and $\delta : G \rightarrow D$ maps an object to its description. More intuitively, a pattern structure is a set of objects with their corresponding descriptions, where similarity between descriptions is computed thanks to \sqcap . This similarity operator \sqcap is idempotent, commutative and associative. The derivation operators can be defined as:

$$A^\square := \bigcap_{g \in A} \delta(g) \quad \text{for } A \subseteq G$$

$$d^\square := \{g \in G \mid d \sqsubseteq \delta(g)\} \quad \text{for } d \in D$$

Each element in D is referred to as a *pattern*. The subsumption order over these patterns is given as: $c \sqsubseteq d \Leftrightarrow c \sqcap d = c$. The operator $(.)^\square$ makes a Galois connection. Then, a *pattern concept* of a pattern structure $(G, (D, \sqcap), \delta)$ is a pair (A, d) where $A \subseteq G$ and $d \in D$ such that $A^\square = d$ and $A = d^\square$, where A is called the concept extent and d is called the concept intent. Pattern concept lattices are defined in the same way as concept lattices in standard FCA.

Interval Pattern Structures. Interval Pattern Structures were first introduced in [6] for dealing with numerical data instead of binary data. Consider two descriptions $\delta(g_1) = \langle [l_i^1, r_i^1] \rangle$ and $\delta(g_2) = \langle [l_i^2, r_i^2] \rangle$, with $i \in [1..n]$ where n is the number of intervals used for the description of entities. The similarity operation \sqcap and the associated subsumption relation \sqsubseteq between descriptions are defined as the convex hull of two descriptions as follows: $\delta(g_1) \sqcap \delta(g_2) = \langle [\min(l_i^1, l_i^2), \max(r_i^1, r_i^2)] \rangle$. Following the definition of a pattern concept discussed previously a interval pattern concept lattice can be built. Pattern structures have also been introduced to deal with graphical data [5].

3.2 Web of Data and its Classification

Web of Data (WOD) is represented in the form of entity and relationships. A standard representation of WOD represents data in the form of RDF (Resource Description Framework) triples written as $\langle subject, predicate, object \rangle$. Here, *subject* can be a URI or a blank node, *predicate* can be a URI and *object* can be a URI, a blank node or a literal. Several RDF triples connect together to form an RDF graph. Table 1 shows an example of RDF triple store from DBLP where each row represents one triple. The subject is the title of the paper, predicates are the relations such as `dc:subject` and `dc:creator` (interpreted as “has keyword” and “has author” respectively) and the objects are the keywords and the authors. The triple t_1 is read as “*paper s_1 has keyword Pattern Structures*”.

<i>tid</i>	Subject	Predicate	Object
t_1	s_1	<code>dc:subject</code>	Pattern Structures
t_2	s_1	<code>dc:creator</code>	$author_1$
t_3	s_2	<code>dc:subject</code>	Formal Concept Analysis
t_4	s_2	<code>dc:creator</code>	$author_2$
t_5	s_1	<code>rdf:type</code>	Publication
t_6	o_{21}	<code>rdf:type</code>	Author
\vdots	\vdots	\vdots	\vdots

Table 1: RDF triples about papers with their authors and keywords from DBLP.

In order to allow interactive data exploration over RDF data, an initial set of restrictions is posed by the expert by defining the task requirement based on which a SPARQL query is created by the expert to obtain the specific data. Then the most important step for interactive data exploration is to perform classification of RDF data. Finally, the expert is allowed to interact with the obtained classification. In the rest of this paper, we further improve the functionalities of the existing tools by introducing several new interactive operations in a new tool called **LatViz**.

4 LatViz for Interactive Exploration of Concept Lattices

4.1 User Interface

The display of **LatViz** resembles **Conexp**³, which provides basic functionalities for building a concept lattice. **LatViz** implements two algorithms for building a concept lattice from a binary context, one of which is introduced in [7]. Another, efficient algorithm for building a concept lattice is **AddIntent** [8]. Demo of **LatViz** is available on-line through this link: <http://latviz.loria.fr/latviz/>.

The concept lattice for the scenario in section 2 was created by mapping the RDF data to a formal context $\mathcal{K} = (G, M, I)$. Based on Table 1, the subjects of the triples were considered as the set of objects G , the objects in the RDF triples i.e., keywords and authors were considered as the set of attributes M . In this example, the RDF triples were created from the publications of the

³ <http://conexp.sourceforge.net/>

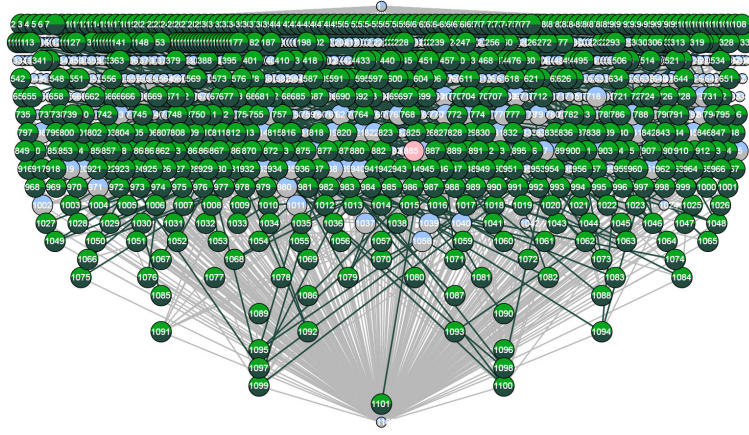


Fig. 2: AOC-Posets.

4.3 Displaying Concept Lattice Level-wise

AOC-Posets actually reduce exploration space but still a huge number of concepts remain to be observed. **LatViz** allows the creation of concept lattice level-wise by interaction. When an expert clicks on the top concept, **LatViz** computes and displays the first level. After that the expert can select the concept for continuing the exploration, then **LatViz** computes the next level for that concept. In Figure 3, the top image shows the first level of the concept lattice built by selecting the top concept. Then the expert can view the contents of each concept on mouseover. In the running example, expert locates the concept with all the papers of Amedeo Napoli (i.e., K#2), which shows that the total number of documents written by Amedeo Napoli are 152. On selecting this concept, the next level of the lattice originating from the selected concept is computed (shown in the bottom image in Figure 3).

4.4 Display Sub/Super Concepts of a Concept

In case of huge concept lattices sometimes it is hard to keep track of the ordering relations between the concepts. **LatViz** allows the expert to only highlight sub-/super concepts of a concept. For example, if the expert wants to display all the publications along with the collaborations of the author Amedeo Napoli, (s)he can highlight the associated sub-lattice of the attribute concept of “Amedeo Napoli”. Figure 4 shows the highlighted sub-lattice in brown. An expert can highlight the super-concepts connected to a concept. If the expert is looking for all the papers having some keywords common with the paper *Knowledge Organization and Information Retrieval Using Galois Lattices* having one or more of the keywords in the intent of the concept then (s)he can highlight the sub-lattice of super concepts associated to it (see Figure 5).

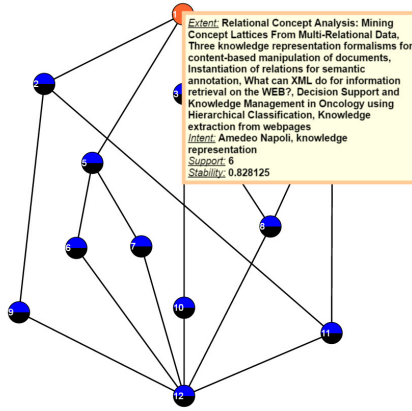


Fig. 6: Showing only sub-lattice of the interesting concept.

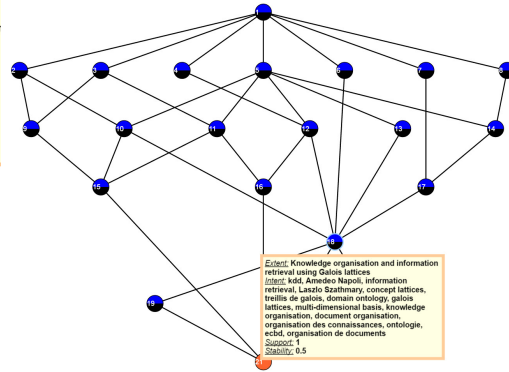


Fig. 7: Showing only super-lattice of the interesting concept.

4.6 Interval Pattern Structures

In the running scenario, we extracted three attributes for the papers i.e., year of publications, rank of the conference in which the paper was published and finally the number of pages. The ranks of the conferences were considered based on COmputing Research and Education (CORE) rankings⁴. The ranks were A*, A, B, C and other which were coded as 1, 2, 3, 4 and 5 respectively. The final concept lattice generated for the last five years of publications of Knowledge Discovery Team is shown in Figure 8.

4.7 Lattice Filtering Criteria

There are two categories of filtering provided by **LatViz**; one is for the concept lattice created with the binary data and the other one is provided for the pattern concept lattice built with the help of interval pattern structures.

Filtering Concept Lattice. After a concept lattice is built by applying FCA, expert is allowed to set several filtering criteria such as stability, lift, extent size, intent size and finally specific object or attribute names. Let us consider that in the running example, the expert is looking for the papers published by Amedeo Napoli on the topic of pattern structures and FCA. A filter on the number of attributes in the intent is set to 3. The filtered concept lattice obtained over the complete lattice in Figure 1 is shown in Figure 9. It further shows the authors with who Amedeo Napoli has worked i.e., Sergei O. Kuznetsov and Mehdi Kaytoue. This part of concept lattice shows the community of authors working with Amedeo Napoli on the topic of pattern structures.

⁴ <http://portal.core.edu.au/conf-ranks/>

Filtering Pattern Concept Lattice. Interval Pattern Concept Lattices can also be filtered by specifying the number of attributes to be considered, the upper and the lower limits for the intervals in the intent of each attribute along with stability, lift and extent size. Let us consider the pattern concept lattice in Figure 8, it can be seen that the concept lattice is hard to interpret. To make it more readable based on what an expert wants, (s)he is allowed to specify filters. For example, if the expert is looking for a paper published in a conference of a rank 1-4 in the year 2012 - 2015 and has the number of pages not less than 2 and no more than 42 then the respective filters can be set for the values of all three attributes. The filtered pattern concept lattice will then only contain the part of lattice needed by the user. Figure 8 shows the concept containing group of papers published from 2014-2015 in conferences with rank 2 having number of pages 2-42.

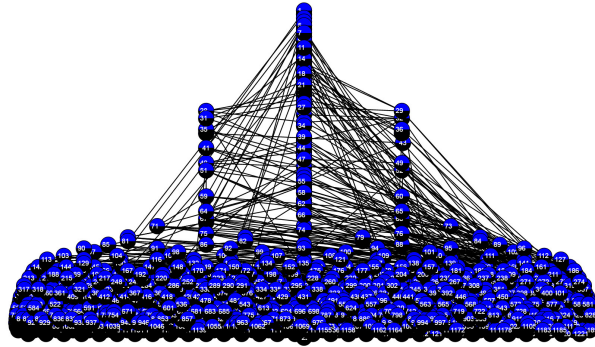


Fig. 8: Interval pattern concept lattice for publications.

4.8 Attribute Implications

One of the many proposed visualization techniques for implications includes *table-based views*. It keeps each column for rule ID, LHS and RHS of the rule, support and confidence measures. These views were used because of the simplicity of storage. However, while expert interaction it is not very convenient to obtain interesting rules at a simple glance as the number of rules can be too many. Another way of visualizing association rules are *Matrix Views*, where rows represent the LHS and columns represent the RHS of the rules. Support and confidence are displayed by different colors in the intersection of the LHS and RHS. In case of a formal context, the number of objects/attributes can be very big leading to problems in displaying the matrix. By carefully taking into account the above drawbacks, we finally settle on visualizing implications with the help of scatter plots, where the x-axis shows the increasing support and the y-axis shows the increasing lift (as we are considering implications the confidence of the rule is always 100%). Such kind of display helps the expert to single-out the rules (s)he wants to visualize based on the values of support and lift. Figure 11 shows implications of the running example, x-axis keeps the support in percentage and y-axis keeps lift. The number on top of the circle shows the number of

rules existing in the same point in the plot. On mouse over, expert can view the implications.

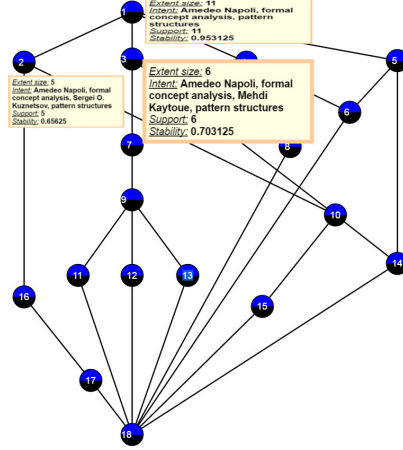


Fig. 9: Filtered concept lattice obtained from binary context.

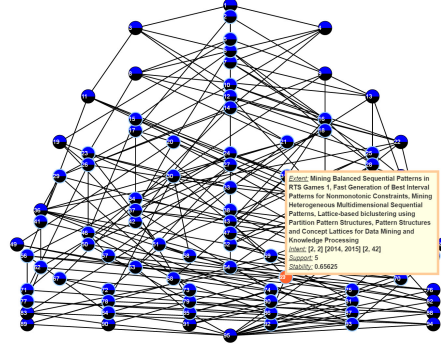


Fig. 10: Filtered Pattern Concept Lattice.

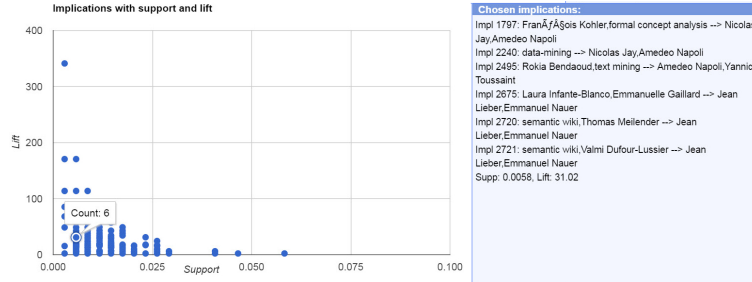


Fig. 11: Attribute implications for the running example.

5 Related Tools

In [4], the authors focus mainly on interactive data exploration over RDF data for interactive knowledge discovery. It clusters RDF triples based on RDF Schema and then allows interactive exploration with the help of RV-Xplorer (Rdf View eXplorer) [3]. It is a tool for visualizing views over RDF graphs mainly for identifying interesting parts of data and allow data analysis. It has also been extended for clustering SPARQL query answers. To-date there have been many other tools developed for reducing the effort of expert in observing and interpreting a concept lattice. Many of the tools have been developed for more specific purposes. CREDO [12] and FooCA [13] are the Web Clustering Engines [14] which take the answers from queries posed against search engines and create a concept lattice which is then displayed to the expert for interaction. CREDO allows only

limited interaction, however, FooCA allows the expert to edit the context and iteratively build the concept lattice. CEM [15] is an email manager which allows quick search through the e-mails and usually deals with smaller concept lattices. Camelis [16] is a system based on FCA for the organization of documents allowing several navigation operations. Another set of tools such as Sewelis [17] and Sparklis [18] allows navigation/interaction over knowledge graphs. Many other tools such as Galicia⁵, ConExp and ToscanaJ⁶ are developed for academic purposes. **LatViz** takes the basic functionalities of ConExp and takes it to the another level by providing visualization for many algorithms introduced over time to increase the readability. Moreover, it re-uses the source-code for building concept lattice with the help of the algorithm in [7] from ToscanaJ [19]. It can not only be applied to WOD but it has been extended for interpreting any kind of data.

6 Discussion and Future Improvements

LatViz is a tool built for allowing expert interaction for data analysis purposes. It provides many new functionalities for reducing the exploration space of the expert and enable him to interpret the results. As a future perspective, we also want to implement other variations of pattern structures such as Pattern Structures introduced for structured set of attributes discussed in [20] and Heterogeneous Pattern Structures [21]. We also want to extend the implementation of implications to association rules. Finally, we also want to take into account matrix factorization.

References

1. Camarda, D.V., Mazzini, S., Antonuccio, A.: Lodlive, exploring the web of data. In: I-SEMANTICS 2012 - 8th International Conference on Semantic Systems, I-SEMANTICS '12, Graz, Austria, September 5-7, 2012. (2012)
2. Heim, P., Lohmann, S., Stegemann, T.: Interactive relationship discovery via the semantic web. In: The Semantic Web: Research and Applications, 7th Extended Semantic Web Conference, ESWC 2010, Heraklion, Crete, Greece, May 30 - June 3, 2010, Proceedings, Part I. (2010) 303–317
3. Alam, M., Osmuk, M., Napoli, A.: RV-Xplorer: A way to navigate lattice-based views over RDF graphs. In: Proceedings of the Twelfth International Conference on Concept Lattices and Their Applications. (2015) 23–34
4. Alam, M., Napoli, A.: Interactive exploration over RDF data using formal concept analysis. In: 2015 IEEE International Conference on Data Science and Advanced Analytics, DSAA. (2015) 1–10
5. Ganter, B., Kuznetsov, S.O.: Pattern structures and their projections. In: ICCS. (2001) 129–142

⁵ <https://sourceforge.net/projects/galicia/>

⁶ <http://toscanaj.sourceforge.net/>

6. Kaytoue, M., Kuznetsov, S.O., Napoli, A.: Revisiting numerical pattern mining with formal concept analysis. In: *Proceedings of the 22nd International Joint Conference on Artificial Intelligence*. (2011) 1342–1347
7. Ganter, B., Wille, R.: *Formal Concept Analysis: Mathematical Foundations*. Springer, Berlin/Heidelberg (1999)
8. van der Merwe, D., Obiedkov, S.A., Kourie, D.G.: Addintent: A new incremental algorithm for constructing concept lattices. In: *ICFCA*. (2004) 372–385
9. Osswald, R., Petersen, W.: A logical approach to data-driven classification. In: *KI. Volume 2821 of Lecture Notes in Computer Science*, Springer (2003)
10. Petersen, W.: A set-theoretical approach for the induction of inheritance hierarchies. *Electr. Notes Theor. Comput. Sci.* **53** (2001) 296–308
11. Berry, A., Gutierrez, A., Huchard, M., Napoli, A., Sigayret, A.: Hermes: a simple and efficient algorithm for building the AOC-poset of a binary relation. *Ann. Math. Artif. Intell.* **72**(1-2) (2014) 45–71
12. Carpineto, C., Romano, G.: Exploiting the potential of concept lattices for information retrieval with CREDO. *J. UCS* **10**(8) (2004) 985–1013
13. Koester, B.: Conceptual knowledge retrieval with FooCA: Improving web search engine results with contexts and concept hierarchies. In: *Advances in Data Mining, Applications in Medicine, Web Mining, Marketing, Image and Signal Mining, 6th Industrial Conference on Data Mining, ICDM Proceedings*. (2006)
14. Carpineto, C., Osiński, S., Romano, G., Weiss, D.: A survey of web clustering engines. *ACM Comput. Surv.* **41**(3) (2009) 17:1–17:38
15. Cole, R., Stumme, G.: CEM - A conceptual email manager. In: *8th International Conference on Conceptual Structures, ICCS, Proceedings*. (2000)
16. Ferré, S.: Camelis: a logical information system to organise and browse a collection of documents. *Int. J. General Systems* **38**(4) (2009) 379–403
17. Ferré, S., Hermann, A.: Reconciling faceted search and query languages for the semantic web. *IJMSO* **7**(1) (2012) 37–54
18. Ferré, S.: SPARKLIS: a SPARQL endpoint explorer for expressive question answering. In: *Proceedings of the Posters & Demonstrations Track a track within the 13th International Semantic Web Conference, ISWC*. (2014)
19. Becker, P., Correia, J.H.: The ToscanaJ suite for implementing conceptual information systems. In: *Formal Concept Analysis, Foundations and Applications*. (2005) 324–348
20. Alam, M., Buzmakov, A., Napoli, A., Sailanbayev, A.: Revisiting pattern structures for structured attribute sets. In: *Proceedings of the Twelfth International Conference on Concept Lattices and Their Applications*. (2015) 241–252
21. Codocedo, V., Napoli, A.: A proposition for combining pattern structures and relational concept analysis. In: *Formal Concept Analysis - 12th International Conference, ICFCA 2014, Proceedings*. (2014) 96–111